


NOMINAL BRAID WIDTH	NOMINAL BRAID THICKNESS	NOMINAL CIRC MILS	CAPACITY AMPS	APPROX AWG EQUIV
.375	.030	7,200	40	12

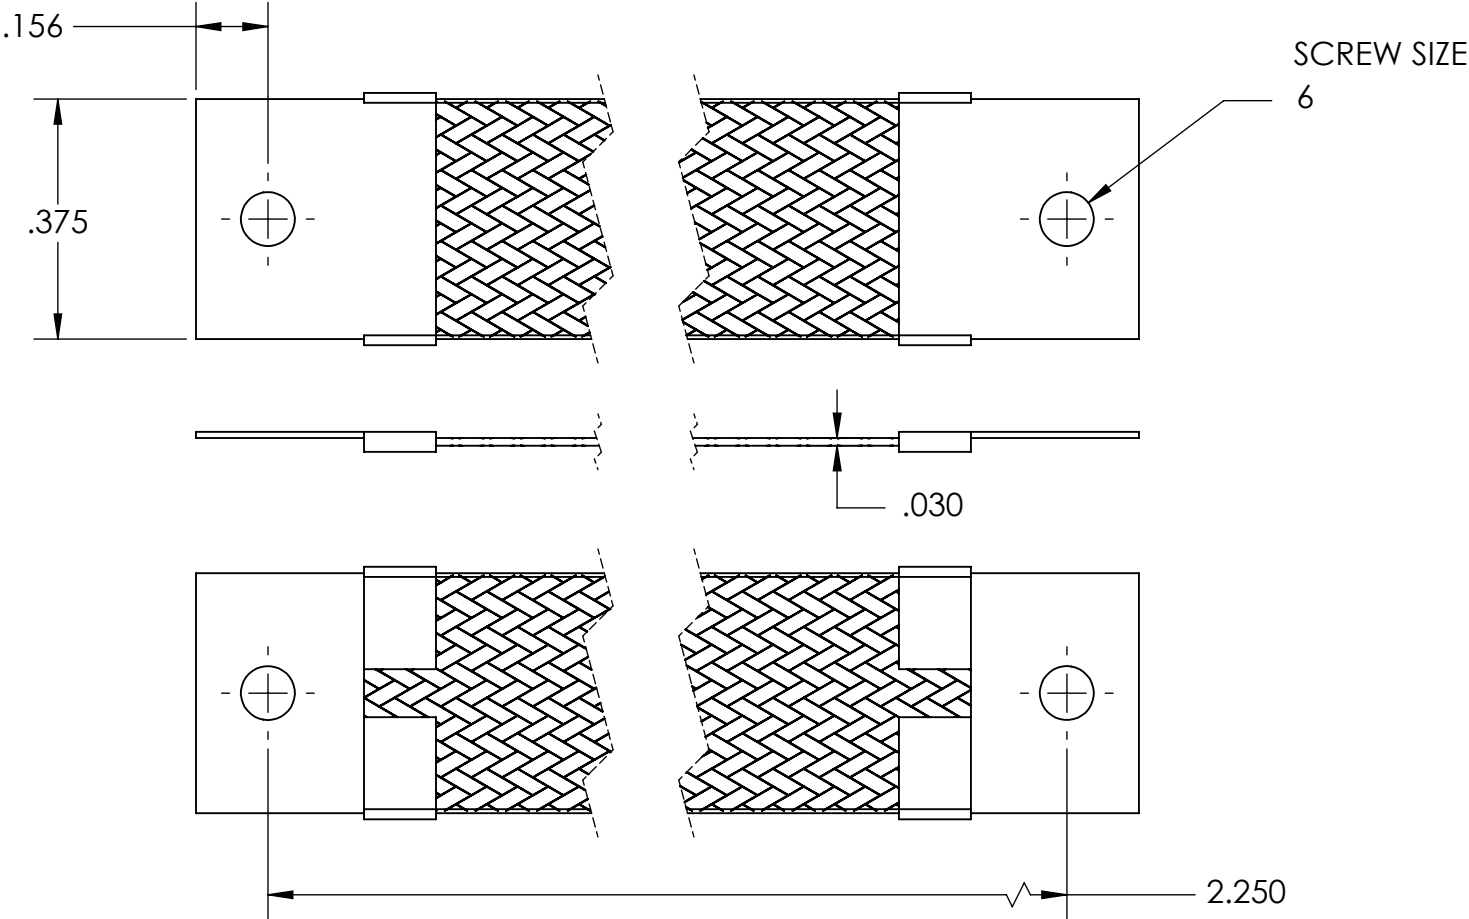

MATERIALS
GROUND ENDS: COPPER (TIN SOLDER DIP)
BRAID: TINNED COPPER
INSULATION: HEAT SHRINKABLE TUBING

ASSEMBLY
TERMINALS (GROUND ENDS) ARE
CRIMPED AND SOFT TIN SOLDERED TO
BRAID.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
SEASTROM MANUFACTURING. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
SEASTROM MANUFACTURING IS
PROHIBITED.

DIMENSIONS ARE IN INCHES ALL DIMENSIONS ARE FOR REFERENCE ONLY		NAME	DATE	SEASTROM MFG		
	DRAWN					
	CHECKED			GROUND STRAP		
	ENG APPR.					
	MFG APPR.					
Q.A.						
MATERIAL SEE NOTES	COMMENTS:					
FINISH SEE NOTES						
DRAWING IS NOT TO SCALE						
				SIZE A	DWG. NO. 5025-103-2.250	REV. -
				[SHEET 1 OF 1]		