


NOMINAL BRAID WIDTH	NOMINAL BRAID THICKNESS	NOMINAL CIRC MILS	CAPACITY AMPS	APPROX AWG EQUIV
1.000	.045	20,800	85	7

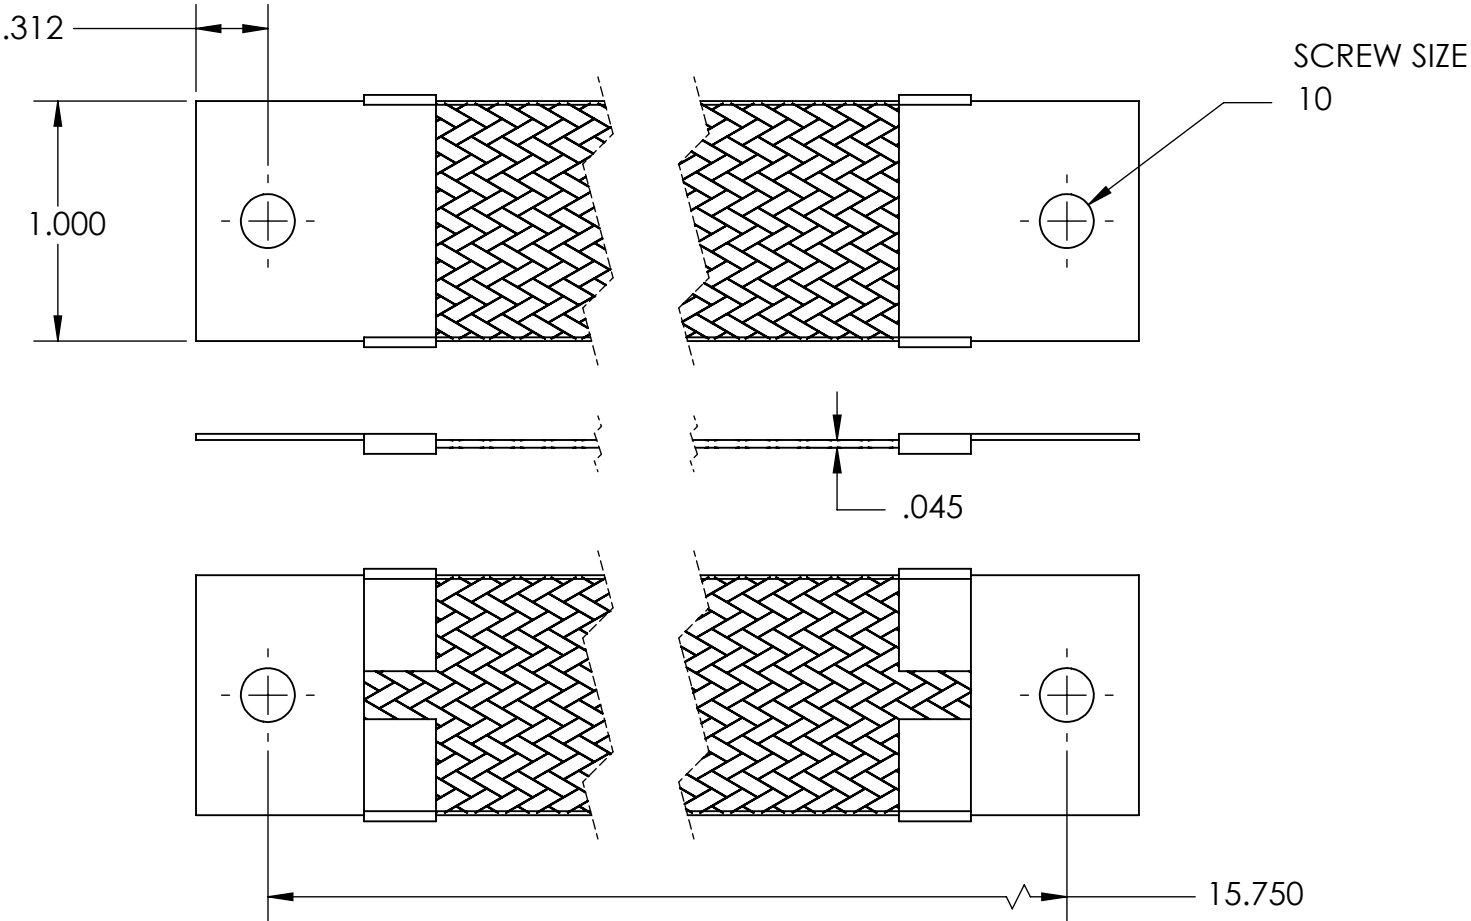

MATERIALS  
GROUND ENDS: COPPER (TIN SOLDER DIP)  
BRAID: TINNED COPPER  
INSULATION: HEAT SHRINKABLE TUBING

ASSEMBLY  
TERMINALS (GROUND ENDS) ARE  
CRIMPED AND SOFT TIN SOLDERED TO  
BRAID.

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
SEASTROM MANUFACTURING. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
SEASTROM MANUFACTURING IS  
PROHIBITED.

DIMENSIONS ARE IN INCHES ALL DIMENSIONS ARE FOR REFERENCE ONLY		NAME	DATE	SEASTROM MFG		
	DRAWN					
	CHECKED			GROUND STRAP		
	ENG APPR.					
	MFG APPR.					
MATERIAL SEE NOTES	Q.A.					
FINISH SEE NOTES	COMMENTS:					
DRAWING IS NOT TO SCALE				SIZE <b>A</b>	DWG. NO. <b>5025-105-15.750</b>	REV. <b>-</b>
				[SHEET 1 OF 1]		