

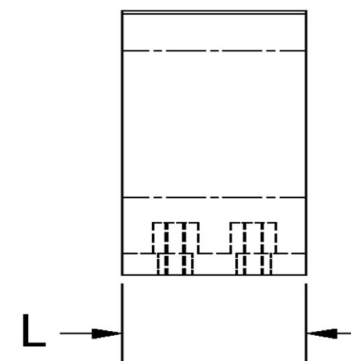


| D+/-0.015 | L+/-0.01 | T (Stk)+/-0.002 | H (Max) | W (Base Max) | X+/-0.02 | A+/-0.005 | B+/-0.005 | I Self Locking Insert |
|-----------|----------|-----------------|---------|--------------|----------|-----------|-----------|-----------------------|
| 1         | 0.687    | 0.032           | 1.175   | 0.510        | 0.683    | 0.188     | 0.312     | 4-40                  |

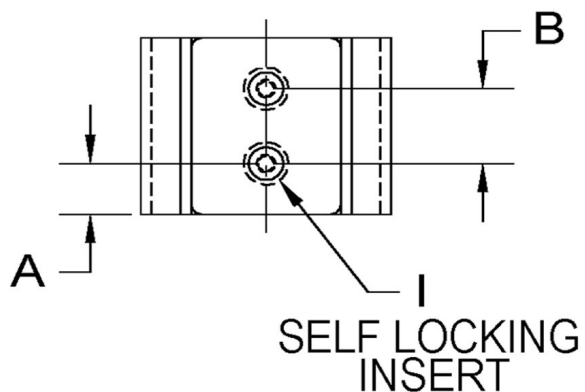

NOTE:

ALL DIMENSIONS ARE TO BE MEASURED WITH THE SPRING CLIP SECURED TO A FLAT SURFACE AND A COMPONENT OF THE NOMINAL DIAMETER IN PLACE.

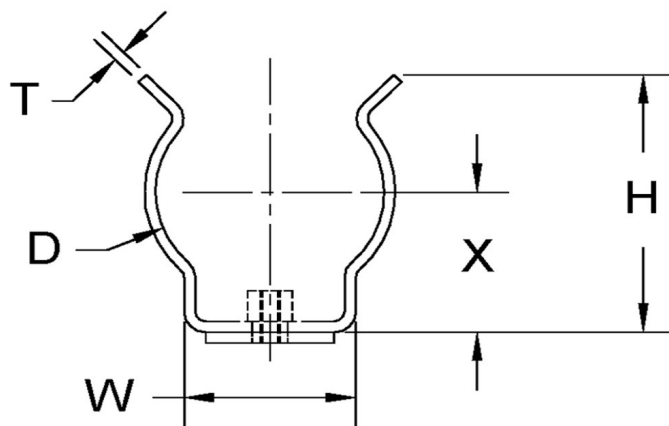

SEASTROM MANUFACTURING CO., INC.  
456 SEASTROM STREET  
TWIN FALLS, IDAHO 83301  
(208) 737-4300 FAX (208) 734-7222

ALL INFORMATION  
COPYRIGHTED BY  
SEASTROM MFG.



PART NO.: 4543-100-68-2-T

PART NAME: Spring Clips 31

MATERIAL: Spring Steel

HEAT TREAT: Please refer to Material & Finish Specifications in Engineering Resources

FINISH: Bright Tin (All Dimensions Are Prior To Plating)

Dimensions in Inches