

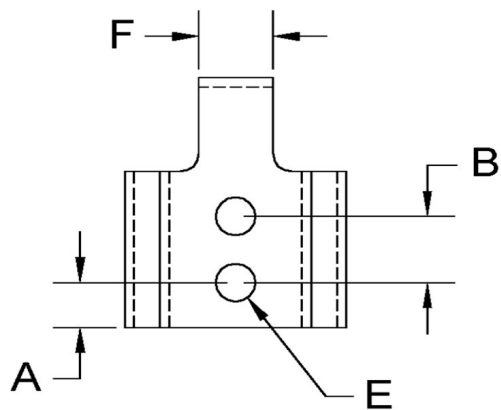


| D+/-0.015 | L1+/-0.01 | L2+/-0.01 | T (Stk)+/-0.0025 | H (Max) | W (Base Max) | X+/-0.02 | E+/-0.003 | A+/-0.005 | B+/-0.005 | F+/-0.01 | G+/-0.01 |
|-----------|-----------|-----------|------------------|---------|--------------|----------|-----------|-----------|-----------|----------|----------|
| 1         | 0.687     | 0.977     | 0.032            | 1.133   | 0.510        | 0.683    | 0.188     | 0.188     | 0.312     | 0.250    | 0.230    |

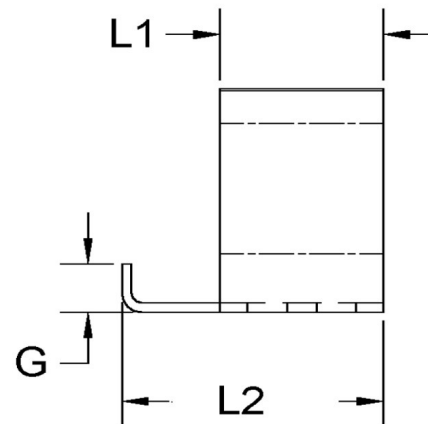

**NOTE:**

ALL DIMENSIONS ARE TO BE MEASURED WITH THE SPRING CLIP SECURED TO A FLAT SURFACE AND A COMPONENT OF THE NOMINAL DIAMETER IN PLACE.

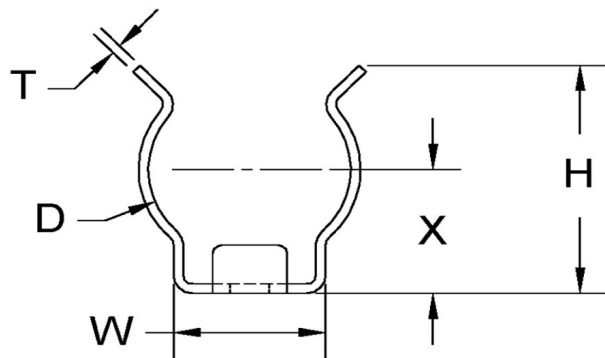

SEASTROM MANUFACTURING CO., INC.  
456 SEASTROM STREET  
TWIN FALLS, IDAHO 83301  
(208) 737-4300 FAX (208) 734-7222

ALL INFORMATION  
COPYRIGHTED BY  
SEASTROM MFG.



**PART NO.:** 4552-100-97-1-T

**PART NAME:** Spring Clips 30

**MATERIAL:** Beryllium Copper

**HEAT TREAT:** Please refer to Material & Finish Specifications in Engineering Resources

**FINISH:** Bright Tin (All Dimensions Are Prior To Plating)

Dimensions in Inches