

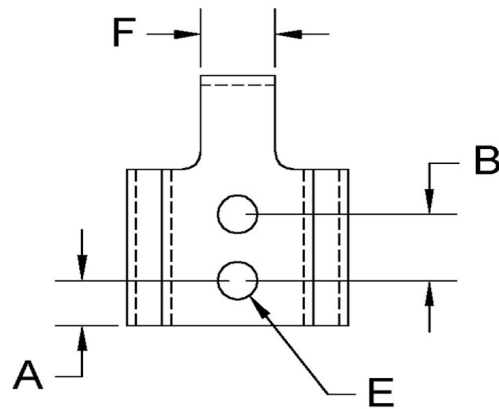


| D+/-0.015 | L1+/-0.01 | L2+/-0.01 | T (Stk)+/-0.0025 | H (Max) | W (Base Max) | X+/-0.02 | E+/-0.003 | A+/-0.005 | B+/-0.005 | F+/-0.01 | G+/-0.01 |
|-----------|-----------|-----------|------------------|---------|--------------|----------|-----------|-----------|-----------|----------|----------|
| 1.375     | 0.687     | 1.062     | 0.032            | 1.460   | 0.510        | 0.880    | 0.188     | 0.188     | 0.312     | 0.250    | 0.250    |

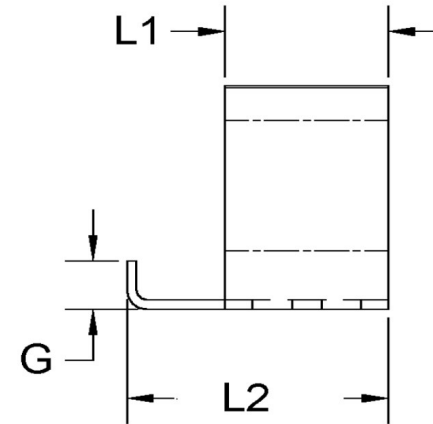

**NOTE:**

ALL DIMENSIONS ARE TO BE MEASURED WITH THE SPRING CLIP SECURED TO A FLAT SURFACE AND A COMPONENT OF THE NOMINAL DIAMETER IN PLACE.

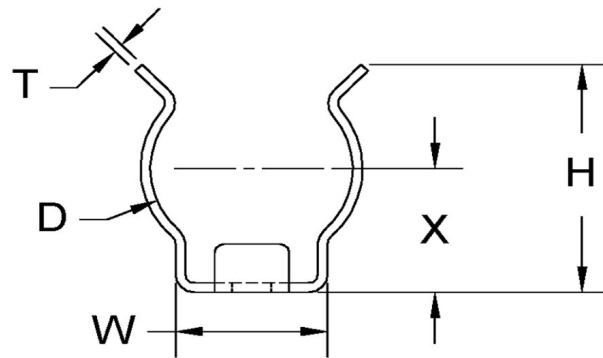

SEASTROM MANUFACTURING CO., INC.  
456 SEASTROM STREET  
TWIN FALLS, IDAHO 83301  
(208) 737-4300 FAX (208) 734-7222

ALL INFORMATION  
COPYRIGHTED BY  
SEASTROM MFG. ©

|                    |                                                                           |
|--------------------|---------------------------------------------------------------------------|
| <b>PART NO.:</b>   | 4552-137-106-1                                                            |
| <b>PART NAME:</b>  | Spring Clips 30                                                           |
| <b>MATERIAL:</b>   | Beryllium Copper                                                          |
| <b>HEAT TREAT:</b> | Please refer to Material & Finish Specifications in Engineering Resources |
| <b>FINISH:</b>     | None                                                                      |

Dimensions in Inches