
## REFEERENCE SEASTROM WORKMANSHIP STD. 8.4.1.W2 $.032 \pm .002$ 1.650 MAX 1.500 ± .015 $.850 \pm .020$ 1.650 MAX $.500 \pm .010$

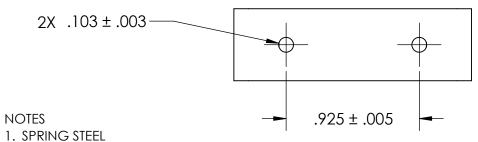

- 2. QUENCH & TEMPER: 80-83 HR15N
- 3. TIN PER ASTM B545 CLASS B w/BAKE
- 4. DIMENSIONS ARE TAKEN WITH THE PART CLAMPED TO A FLAT SURFACE AND A DUMMY COMPONENT IN PLACE.
- 5. DIMENSIONS APPLY PRIOR TO PLATING.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SEASTROM MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SEASTROM MANUFACTURING IS PROHIBITED.

	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL±1/32 ANGULAR: MACH±1/2 Deg TWO PLACE DECIMAL ±.01		NAME	DATE		SEASTROM MFG	
		DRAWN					
		CHECKED					
		ENG APPR.			SPRING CLIP		
	THREE PLACE DECIMAL ±.005	MFG APPR.					
	MATERIAL SEE NOTE 1	Q.A.					
		COMMENTS:			1		
	HEAT TREAT				CIZE	DWG. NO.	REV.
	SEE NOTE 2					4561-150-50-2-T	KEV.
	FINISH				Α		_
	SEE NOTE 3	DRAWING IS NOT TO SCALE			1	SHEET 1 C	OF 1