

REFEERENCE SEASTROM WORKMANSHIP STD. 8.4.1.W2

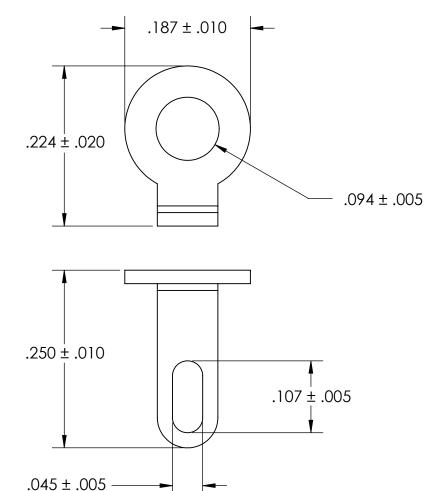

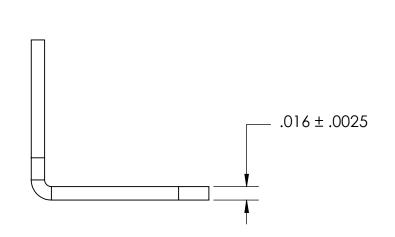

NOTES

1. TIN-LEAD PER AMS-P-81728 w/COPPER UNDERPLATE. MUST CERT SOLDERABILITY TO MIL-STD-202, M208

2. SCREW SIZE: 2

3. DIMENSIONS APPLY PRIOR TO PLATING.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
SEASTROM MANUFACTURING. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
SEASTROM MANUFACTURING IS
PROHIBITED.

	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL±1/32 ANGULAR: MACH±1/2 Deg TWO PLACE DECIMAL ±.01	DRAWN	NAME	DATE	SEASTROM MFG	
		CHECKED			SOLDER LUG	_
		ENG APPR.				
	THREE PLACE DECIMAL ±.005	MFG APPR.				
	BRASS, HALF HARD	Q.A.			7	
		COMMENTS:			7	
	SEE NOTE 1					EV.
	DRAWING IS NOT TO SCALE				A 5445-1-TL1 -	
		1			SHFFT 1 OF	- 1